

EasyRiser Kit for use with 10 x 15 Trimline Canopy

Instructions for Use

The EasyRiser makes it simple to lift the canopy roof without needing assistance from a second person.


This kit contains (2) Door Ells. Additionally, you will be using two of the Canopy Legs..



Door Ell

Getting Ready to Raise the Roof

1. **As you set up the canopy roof frame:** Slide Door Ell Joints onto the upper horizontal poles at the front and back of the frame, locating them as close to center as possible. Do not tighten thumbscrews.

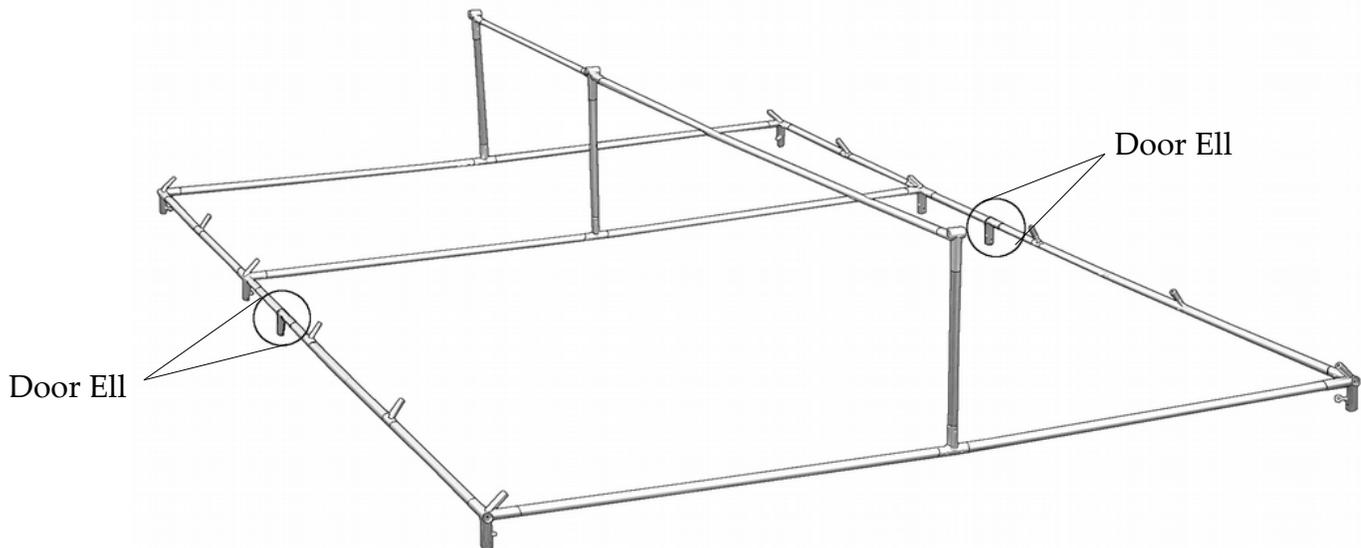

*Illustration shows placement for using the booth with the 15' length at the front. If you'll be using the 10' length at the front, place Door Ells right next to the sliding tees that support the Riser poles at the front and back edges.

2. Finish assembling the canopy roof frame and rafters.

3. Temporarily attach one canopy leg to the Door Ell on the front horizontal pole, allowing the leg to sit inside the canopy frame.

4. Spread canopy top over roof frame.

***Note:** If space allows, it is helpful to position the roof frame approximately 2' further back into your booth space than you wish the canopy to stand.

(over, please)

5. Standing at the front of the canopy, lift front edge of roof frame until the Leg swings down to support the roof.

6. Insert two of the legs into the front Corner Joints. You may choose to install the telescoping legs in their extended position, or you may install them in the collapsed position and extend them one at a time once they are all in place. Remove Leg you used to prop the canopy and move it into it's final position at the 4-way joint with rafter base. Swivel the Door Ell up out of the way, securing it with the thumbscrew.



Canopy roof raised and supported on leg



Front legs attached, removing the leg

7. Now insert a Leg into Door Ell at the rear edge of the roof frame. Lift the back edge of the canopy, allowing leg to swing into place to support roof while you attach the remaining two legs. You may need to use the support Leg itself to push the frame all the way to it's full height.

8. With the rear corner legs in place, remove and replace center Leg into it's final position in the 4-way joint with rafter base.

9. **To take the canopy down:** After removing all StaBars, move the Rear Leg back to the Door Ell on the rear wall and remove rear corner legs. Lower back edge of canopy carefully and remove Rear Leg. Repeat at the front edge, lowering the roof frame to ground.



Pushing rear edge of frame up using leg

A word of caution for windy days: All canopies are vulnerable to wind gusts until they are securely tied or weighted down. Be especially careful while you have the front legs installed and the back edge of the canopy resting on the EasyRiser pole. Ask a neighbor to help hold it down while you finish installing the legs.