


# TrimLine Double Awning 20'

## Assembly Instructions

### PARTS LIST:

- (3) LD EII joints (Black arrows and Thumbscrews)
- (2) Awning EII Joints
- (1) Awning Tee Joint
- (6) Thumb-screws
- (8) 6" White Ball Bungees
- (2) 10" White/Black Ball Bungees for center joint
- (3) Poles (coded AWN) - snap-buttons at each end
- (2) Male pole section – 61"
- (2) Female Pole Section – 58 1/4"
- (2) Vinyl Awning Cloth with grommets and zippers
- (1) Vinyl Joiner Tarp
- (2) Black Ball Bungees for bundling poles

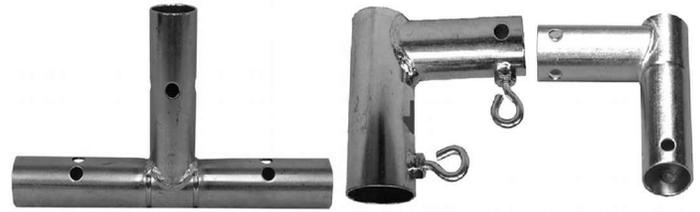

Awning Tee

LD EII  
(with black  
arrow)

Awning EII

1. While assembling the canopy, **before attaching legs to canopy frame**, slide LD EII joints (black arrows point down) onto the upper leg sections of three legs on the side where you would like the awning. Loosely tighten thumbscrews to keep joints from sliding during set-up.

2. Complete set up of TrimLine frame, roof and legs.



3. Slide LD EII Joints to the tops of the canopy legs, without allowing them to slide up over the Canopy Corner Joint. Use the thumbscrew to secure in place with the open barrel facing out.

4. Attach poles marked AWN to LD EII Joints.

5. Attach EII Joints to ends of AWN poles at both corners of the Canopy, and attach the Tee Joint to the center AWN pole.

6. Click together the male and female poles to form two 116 1/2" long poles.

7. Attach front 116 1/2" poles to the Tee and EII joints to complete set up of the frame.

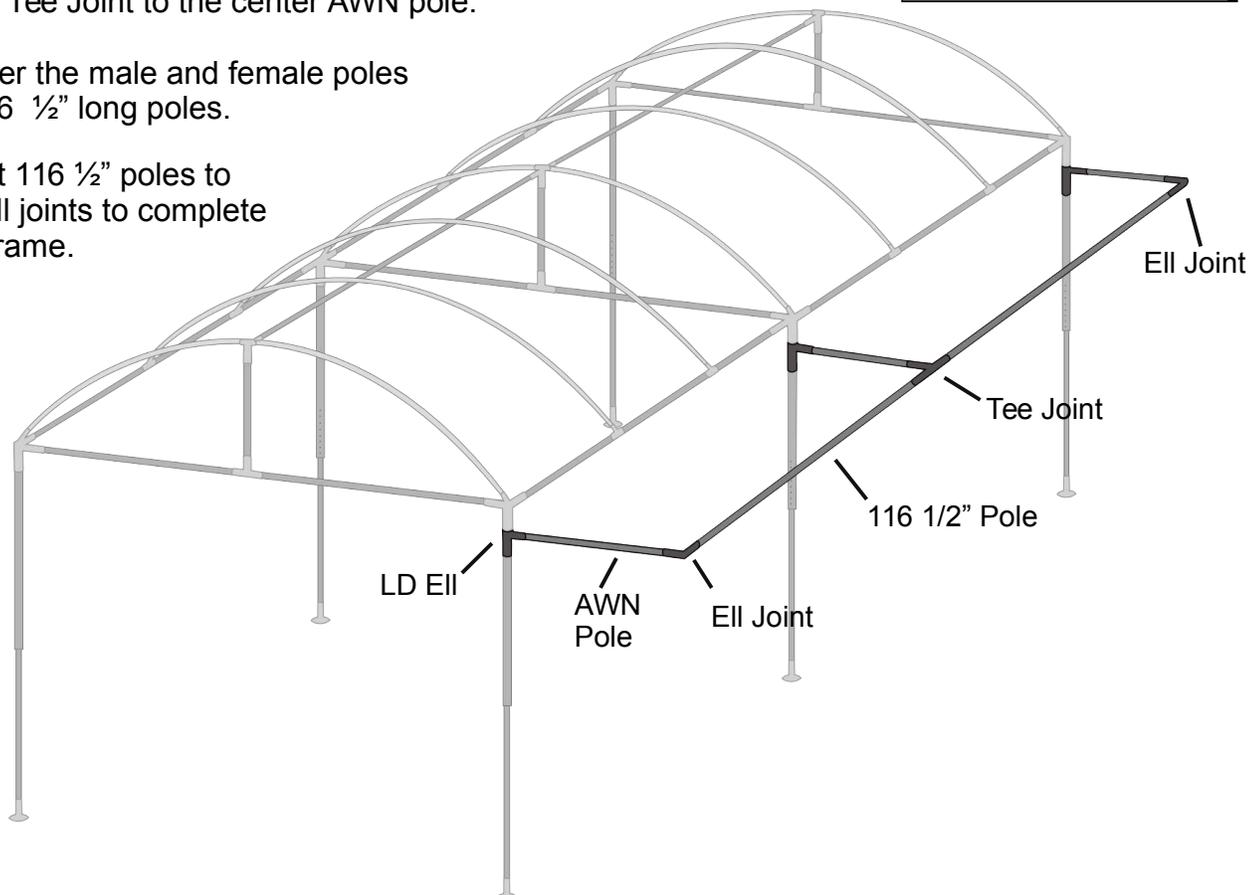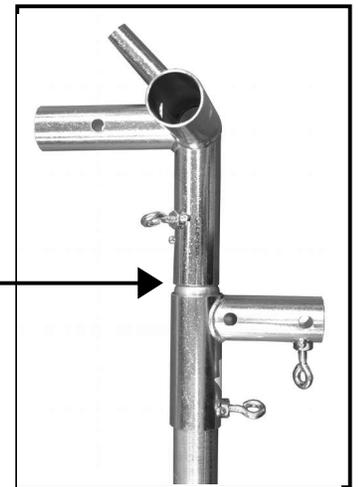


8. Zip Awning cloths to canopy roof (same zippers that you would use to attach a side-wall) and secure Velcro straps to the upper horizontal pole of the canopy.


9. Attach front edge of awning cloth to outer pole of frame using the white ball bungees.

At the corners, pull the loop around both angles of the joint at once and loop around ball.


In the center, use the two longer white/black bungees, wrapping over and around the Tee Joint, as shown.



Corners

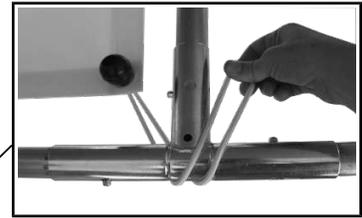


Center – step 1

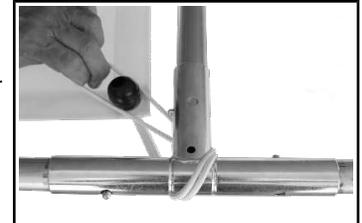


Center – step 2



10. With the awning in place, adjust the Velcro at the corners of the canopy to allow the valance to lay smoothly over the awning.



In-line

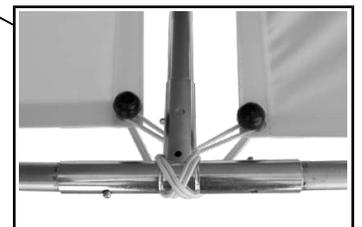

Center – step 3

### A note on using awnings on adjacent sides of your canopy:

If you will be using two awnings, you may wish to substitute a 3-way joint for the ells in the shared corner. If you would like wrap around coverage, we offer an Awning Corner Cloth that simply Velcros into place to bridge the space between the two awnings.



3-way Joint



Awning Corner Cloth

### Using your canopy sidewalls with Awnings:

You will find a second zipper on the awning that you can use to attach your sidewall. Although the walls will NOT zip together at the corners with the awning frame in place, there are other options for closing up:

- a. You may use the windstraps on the walls to attach them to the legs during business hours and then take your awning frame down in order to zip up securely at night. (Remove poles, loosen thumbscrews and swivel joints towards the interior of the canopy.)
- b. Our optional **Awning Zipper Strips** allow the sides to be zipped together without removing the awning frame.